AD NUMBER
AD456205
LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited. Document partially illegible.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; DEC 1964. Other requests shall be referred to Office of Naval Research, Washington, DC 20360. Document partially illegible.

AUTHORITY

ONR ltr, 28 Jul 1977

UNCLASSIFIED

456205

SE DOCUMENTATION CENTER

FOR

NTIFIC AND TECHNICAL INFORMATION

ERON STATION ALEXANDRIA. VIRGINIA

UNCLASSIFIED

Generation of Accurate Frequency-Sweep Waveforms by Direct Synthesis

by

R. B. Fenwick and G. H. Barry

December 1964

DDC

FEB 10 1965

DDC-IRA B

RADIOSCIENCE LABORATORY

STANFORD ELECTRONICS LABORATORIES

STANFORD UNIVERSITY · STANFORD, CALIFORNIA

GENERATION OF ACCURATE FREQUENCY-SWEEP WAVEFORMS
BY DIRECT SYNTHESIS

by

R. B. Fenwick and G. H. Barry

December 1964

Technical Report No. 99

Radioscience Laboratory
Stanford Electronics Laboratories
Stanford University   Stanford, California

ABSTRACT

A signal whose frequency is a continuously varying function of time may be synthesized to any desired accuracy by digitally programming a "direct" frequency synthesizer. A synthesizer of this type (the Hewlett-Packard 5100A-5110A) can be modified to obtain phase-coherent frequency switching within a few hundred nanoseconds. The practicality of this mode of synthesizer operation has been demonstrated by the operation of a frequency-synthesized hf meteor radar. Two Hewlett-Packard synthesizers were modified and electronically programmed to generate 100-kc, 1-sec, linear frequency sweeps. The radar achieves close to the theoretically expected range and doppler resolutions of 1.5 km and 1 cps, respectively. It is expected that this extension of the use of frequency synthesizers for generating other than constant- or stepped-frequency signals will find many other applications where signals of precisely time-varying frequency are needed.

CONTENTS

ILLUSTRATIONS

Figure

I. INTRODUCTION

A signal whose frequency is a continuously varying function of time may be accurately synthesized by digitally programming a "direct" frequency synthesizer. This technique, recently developed at the Stanford Radioscience Laboratory, thus extends the precision of frequency synthesis to a variety of applications beyond the usual fixed-frequency case.

One use of a sweep-frequency waveform is for an FM radar in which the signal frequency is a linear function of time. Any nonlinearity in the frequency has the effect of degrading the radar range and doppler resolution. Such imperfections may be reduced to insignificance through the use of a synthesized waveform. The synthesis equipment to be described was developed originally for use in an hf meteor radar having range and doppler accuracy unattainable by conventional methods of FM sweep generation.

II. SYNTHESIS OF LINEAR SWEEPS

A variable-frequency signal may be approximated by a succession of segments, each having constant frequency. The approximation may be made as good as necessary by making the time between frequency changes so short that the piecewise constant-frequency waveform never departs significantly in phase from the ideal. In order to accomplish the frequency switching quickly and with phase coherence, it is desirable to employ a means of synthesizing each of the constant frequencies underline{directly}, without the use of phase-locked oscillators. The Hewlett-Packard 5100A-5110A synthesizer is an example of the "direct" type and was used as a starting point in the design of a sweep-frequency synthesizer. The block diagram of Fig. 1 shows the basic design philosophy.

FIG. 1. SIMPLIFIED BLOCK DIAGRAM OF SWEEP-FREQUENCY SYNTHESIS
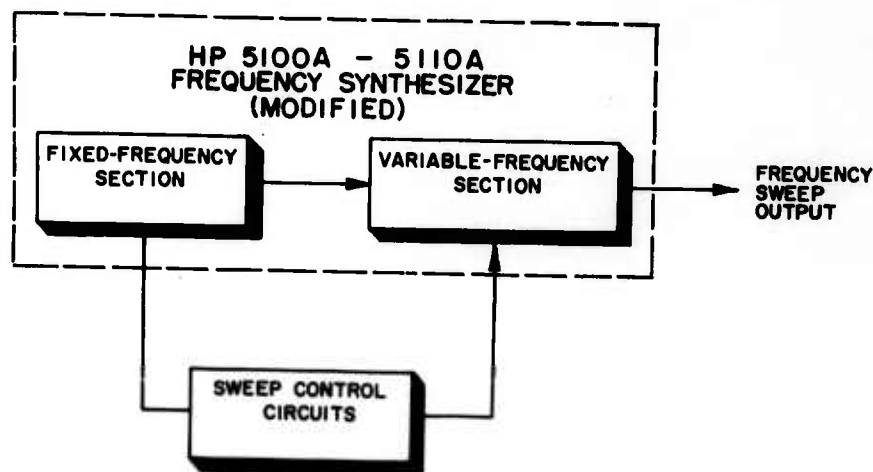EQUIPMENT.

A sweep was needed for use in an FM radar with range and doppler resolutions of 1.5 km and 1 cps, respectively. These numbers translate to a 100-kc frequency sweep in 1 sec. Figure 2a shows the desired sweep as a function of time. The staircase frequency of Fig. 2b is generated by switching in 1-cps increments every 10 μsec. A better approximation
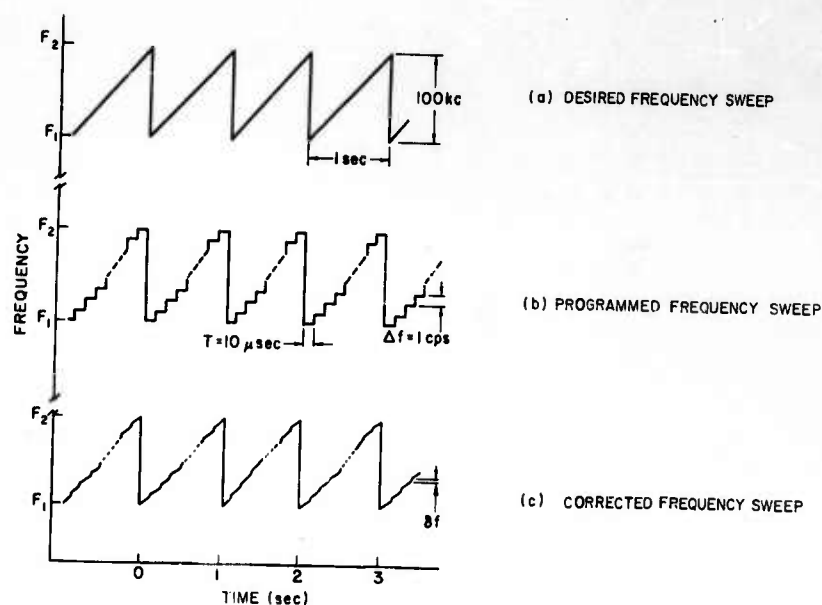
FIG. 2. IDEAL AND APPROXIMATED LINEAR FREQUENCY SWEEPS.

(Fig. 2c) could easily be obtained by adding in 1-cps frequency ramps, but such a correction is unnecessary for the hf radar application. Even the signal of Fig. 2b never departs in phase from the ideal by more than 0.0003 deg.

To electrically program the HP synthesizer requires a voltage on one wire out of ten for each of the frequency decades controlled. A 100-kc sweep in 1-cps steps then requires control of five decades (50 wires). This was accomplished by the use of five 10-element ring counters. The counters were cascaded as frequency dividers, as shown on the block diagram of Fig. 3, with the fastest counter--which controls the "1-cps" decade within the synthesizer--driven at a rate of 100 kc. The counters consist of high-speed transistor flip-flops constructed on circuit cards. Examples of the cards used are shown in Fig. 4. Figure 5 is a photograph of enough digital control circuitry to sweep eight decades of the synthesizer; only five are controlled for the present application.

Figures 1 and 3 indicate that the switching rate and times are controlled from the same frequency source that operates the synthesizer. This is necessary because of the requirement that frequency switching be

- 3 -

SEL-64-130

INPUTS FROM HP 5110A
SYNTHESIZER DRIVER

3.0 Mc   3.1 Mc

MIXER

100-kc
PULSES

MANUAL
SYNCHRONIZING
INTERRUPTER

DECADE
RING COUNTER
0 1 2 ⋮ 9

DECADE
RING COUNTER
0 1 2 ⋮ 9

DECADE
RING COUNTER
0 1 2 ⋮ 9

OUTPUTS TO
CONTROL
HP 5100A
SYNTHESIZER

TO
I-cps
GATES
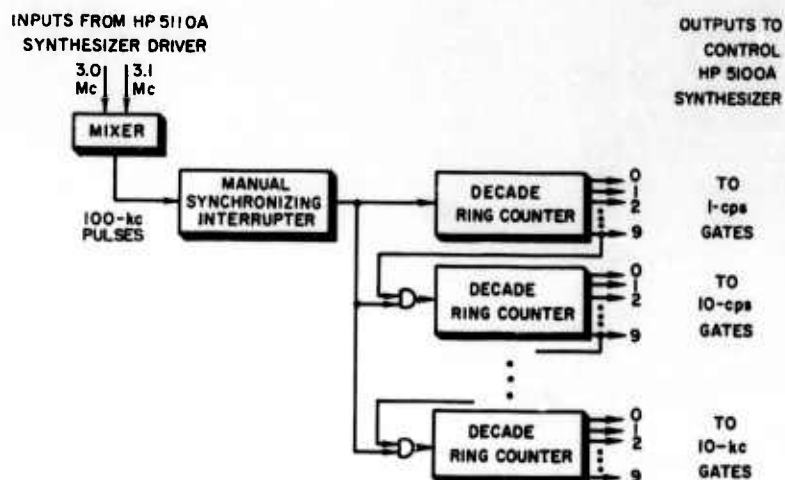
TO
10-cps
GATES

TO
10-kc
GATES

FIG. 3.   BLOCK DIAGRAM OF FREQUENCY CONTROL EQUIPMENT FOR
LINEAR SWEEP.

accomplished with phase coherence. The HP synthesizer derives each
frequency increment by choosing one of ten signals. For frequency incre-
ments of 100 kc or less, these signals are 3.0, 3.1, ..., 3.9 Mc. The
spacing between these increments (100 kc) implies that any two will be
of identical phase at instants separated in time by 10 μsec. Any switch-
ing to be done must occur close to these times, otherwise the resulting
phase discontinuity will produce a transient amplitude variation in suc-
ceeding tuned circuits and upset the operation of the synthesizer. These
times of phase equality are determined by the frequency standard which
drives the synthesizer; hence the same frequency source must be used to
control the switching counters. The 100-kc counter advance for the present
application was derived by mixing two of these 100-kc-spaced signals in
the chassis shown in Fig. 6.

The switching time required for the HP 5100A-5110A synthesizer to
settle on a new frequency is specified by the manufacturer as 1 msec,
although most frequency changes are accomplished in much less time than
this. However, in the present application, the synthesizer must be
switched to a new frequency every 10 μsec, so it is not surprising that
major modifications to the Hewlett-Packard equipment are necessary.
Rapid switching raises two problems, which are discussed in the follow-
ing sections.

- 4 -
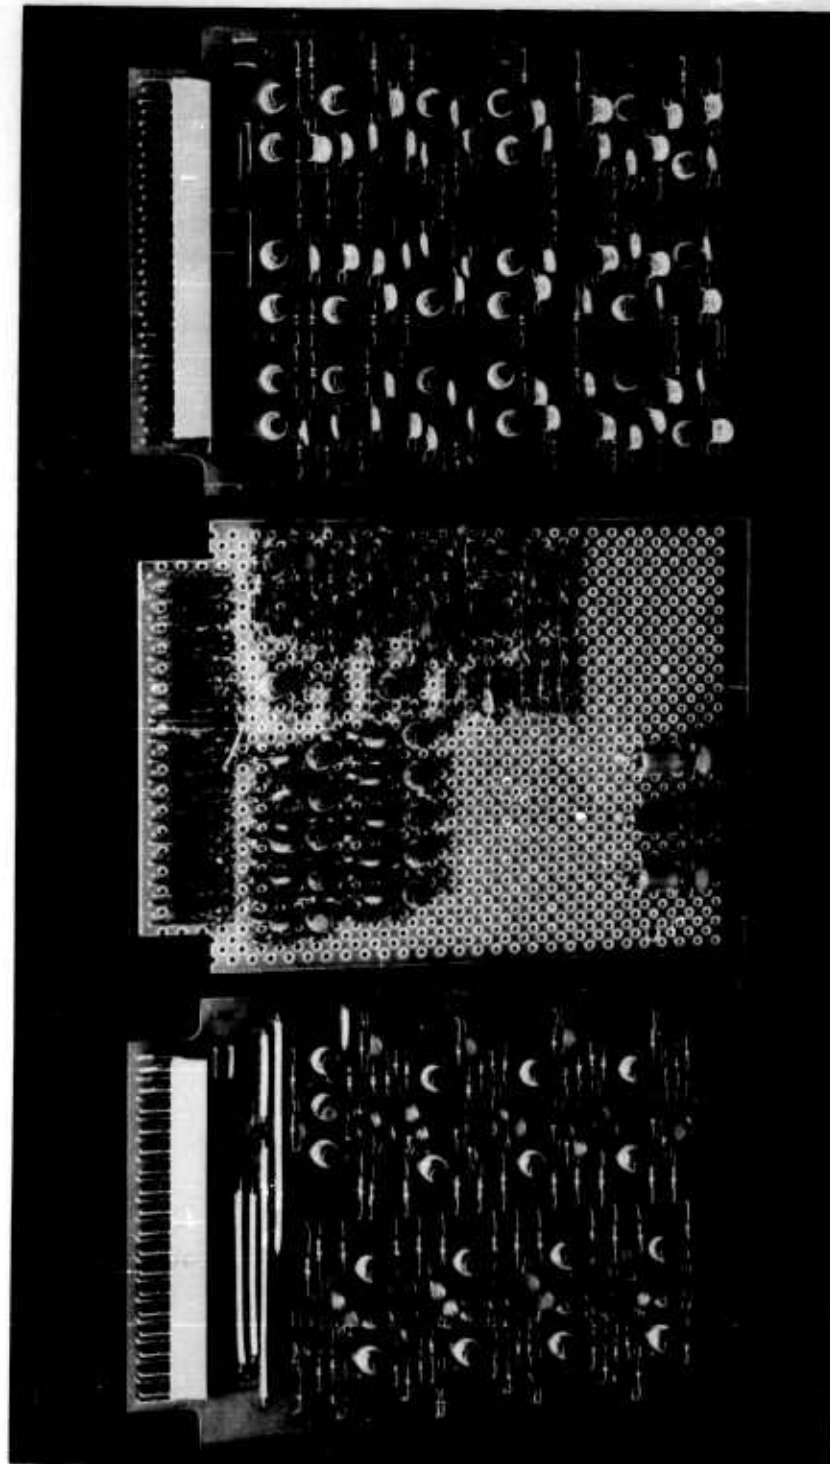
Ring Drivers
(2 Required)

Gate Drivers Plus
2 Ring Stages
(5 Required)

8 Ring Stages
(5 Required)

FIG. 4. CIRCUIT BOARDS USED IN SYNTHESIZER CONTROL UNITS (NUMBER REQUIRED IS FOR FIVE-DECADE SWEEPING).

SEL-64-130
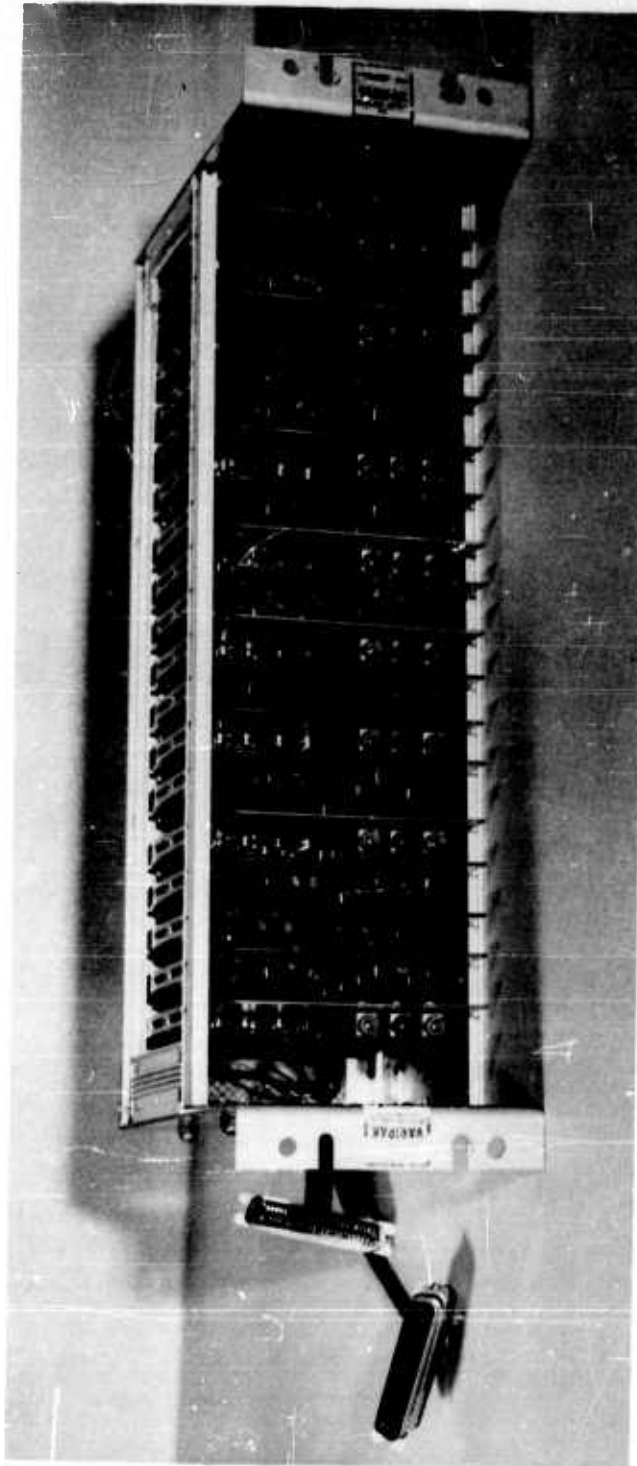
FIG. 5. PHOTOGRAPH OF DIGITAL FREQUENCY CONTROL EQUIPMENT.

SEL-64-130
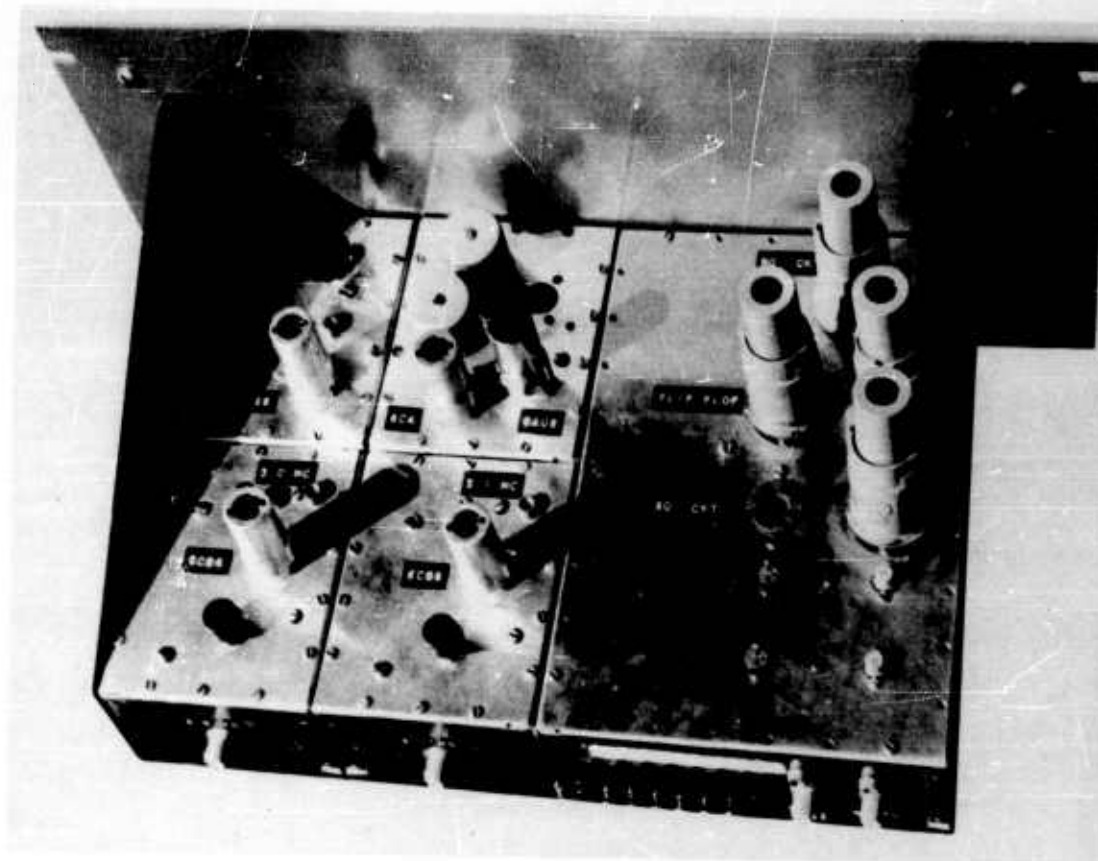
FIG. 6. COUNTER-DRIVER CHASSIS.

A. OBTAINING PHASE COHERENCE

In the original synthesizer design, no attempt was made to obtain phase coherence among the ten signals which are pushbutton or gate selected in each of the frequency decades. Indeed, since the signals are of different frequencies, "phase equality" has no meaning unless a specific instant in time is specified, and it is generally desirable to permit frequency switching to occur at times not under the control of the synthesizer. For the sweep-frequency application, it was therefore necessary to adjust the phase of the ten basic frequencies so that all lined up in phase at desired switching times.

For the present application, it is only necessary to achieve a phase accuracy which does not result in an appreciable amplitude transient at the input to succeeding frequency divider stages. The phase adjustment

- 7 -   SEL-64-130

is easily accomplished since each of the basic signals is derived in the
HP 5110A fixed-frequency section by division from 30-39 Mc. Causing
these divide-by-10 circuits to skip entire cycles (at their inputs)
shifts the phase of their outputs in one-tenth-cycle increments; this is
a sufficiently fine adjustment. A switch for interrupting the divider
operation on nine of the ten basic frequencies was installed on the 5110A
front panel (see Fig. 8, pages 11 and 12).

B. OBTAINING FAST FREQUENCY SWITCHING

In addition to achieving phase coherence at the instants of frequency
switching, it is necessary to accomplish the actual signal gating rapidly
(compared to the period of the chosen frequencies, 3.0 to 3.9 Mc). Gates
within the HP 5100A synthesizer were not designed with this requirement
in mind, and it is necessary to 1) remove all blocking and bypass capaci-
tors associated with these gates in order to shorten their transient
response, and 2) install emitter followers in the ten signal lines to
provide low-impedance signal sources for the gates. The redesigned gates
have a switching time on the order of 200 nsec. These modifications have
the disadvantage that they degrade the spurious signal suppression to only
about -40 db, a figure which may not be satisfactory in some applications.
This aspect of performance could be improved, but not without major
redesign of the synthesizer frequency-gating circuits.

SEL-64-130

III. USE IN HIGH-FREQUENCY FM RADAR

Frequency modulation has been widely employed in radars since its use makes possible the transmission of powers several orders of magnitude greater than may be obtained in straightforward short-pulse operation, thus increasing radar range. Reduced to simplest terms, continuous-wave FM radar operation against a stationary target involves two operations:

1. Transmitting a linear ramp of instantaneous frequency vs time, and
2. Mixing the delayed "echo" ramp energy with the outgoing ramp in a receiver, resulting in a beat note in the receiver output whose frequency is directly proportional to target range.

Thus the range resolution is limited by the accuracy to which the received beat frequency can be measured. This ability, in turn, depends upon the length of time the beat frequency is available for measurement (related ultimately to sweep width) and the extent to which it remains constant throughout the sweep. For a constant-frequency beat note, the frequency ramp must be absolutely linear. This fact motivated the development of the presently described system.

The complete FM radar system, which employs the sweep-frequency synthesizer, is shown in the block diagram of Fig. 7. To observe short-range targets using a 1-sec transmission requires that transmitting and receiving equipment be separated by a distance sufficient to reduce direct signals between the sites to an acceptably low value. Thus, two synthesizers are required, one at the transmitting site and one at the receiving site.

At the transmitting site, the synthesizer output is amplified to the desired power level using an ordinary class C hf transmitter. The received signal is translated to the i-f of a normal communications receiver using the second synthesizer as a local oscillator. Time synchronization of the two synthesizers is accomplished at the receiver site by interrupting the counter advance line for short, calibrated times until the desired sweep alignment is achieved.
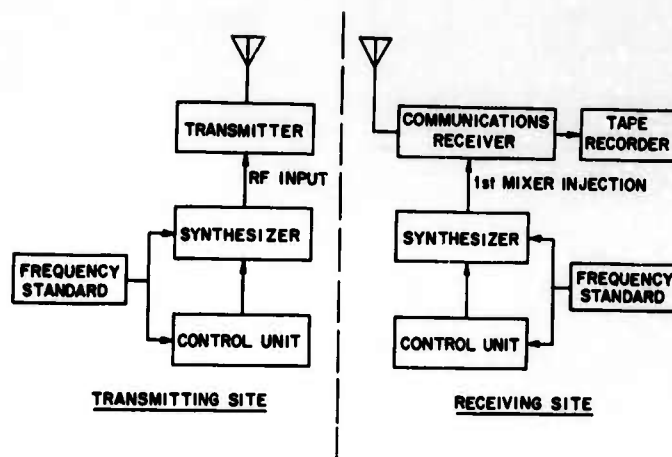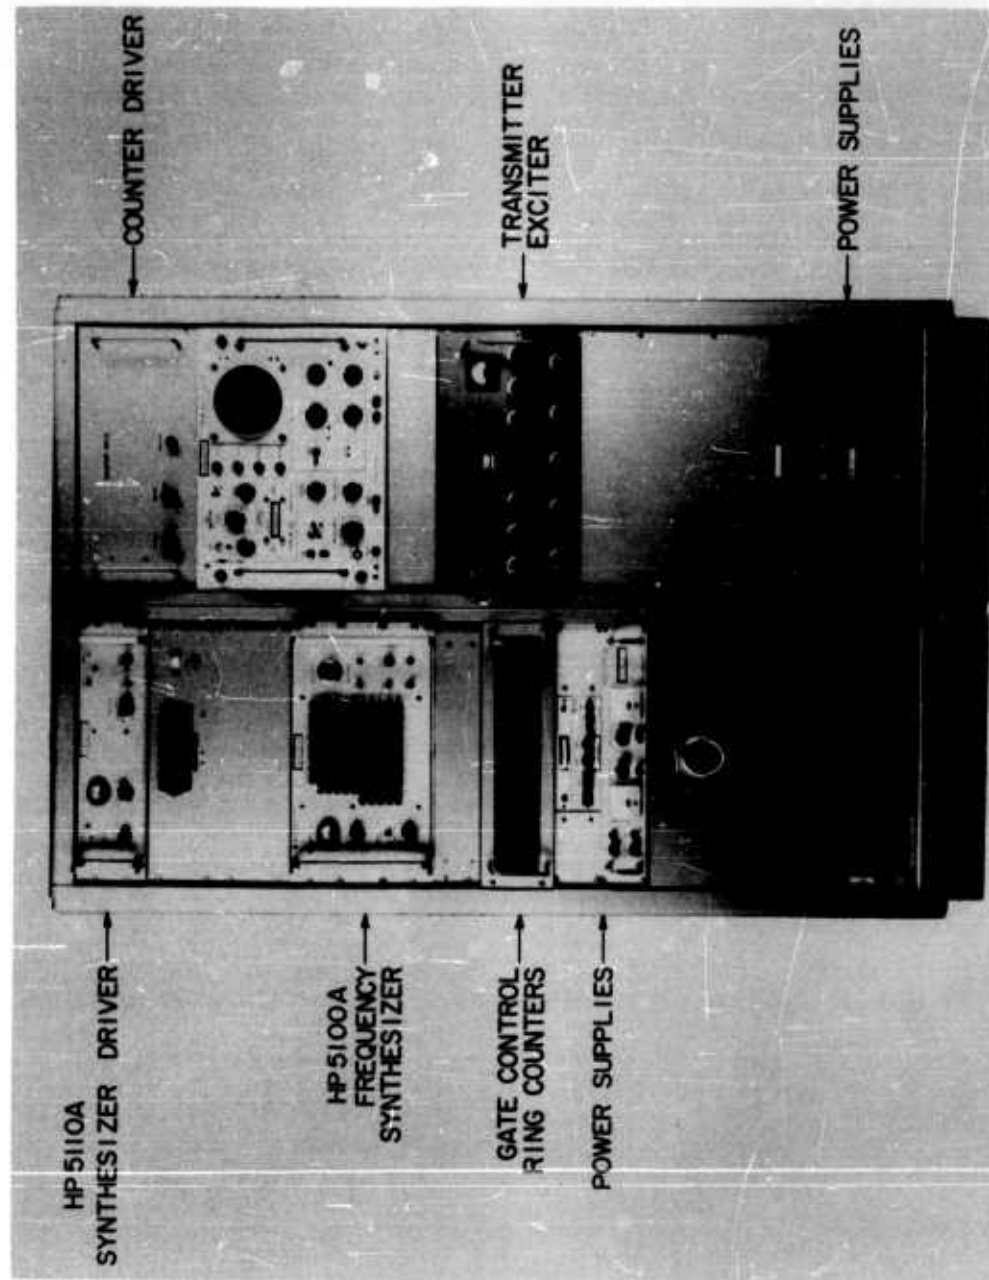
FIG. 7. SIMPLIFIED BLOCK DIAGRAM, FM RADAR
SYSTEM.

The photographs of Fig. 8 show complete transmitting and receiving systems, except for the hf transmitter final amplifier. A second receiver is included for band monitoring while the equipment is in operation. The oscilloscopes are needed primarily for accomplishing the phase adjustment within the synthesizers, a task which requires only a minute but must be repeated each time the HP 5110A synthesizer driver is turned on (hence, it is normally left on).

Figure 9 shows two range-plus-doppler vs time records made with the cw, FM radar. A 500-w transmitter was employed; three-element beam antennas were used for both transmitting and receiving. The records were produced by spectrum analysis of the receiver-detector output voltage. Figure 9a shows echoes from meteors (approximately 60 per minute), while Fig. 9b shows backscatter from the ground following an ionospheric reflection. Tests have shown that the theoretical resolutions of 10 μsec and 1 cps have been closely approached. The radar sensitivity is comparable with that of a cw system employing a 1-cps bandwidth.

SEL-64-130

a. Transmitting system

FIG. 8. FM RADAR TRANSMITTING AND RECEIVING SYSTEMS.

SWEPT RECEIVER

MONITOR RECEIVER

ANTENNA MULTICOUPLER

POWER SUPPLIES

HP 5110A SYNTHESIZER DRIVER

HP 5100A FREQUENCY SYNTHESIZER

GATE CONTROL RING COUNTERS

POWER SUPPLIES

COUNTER DRIVER
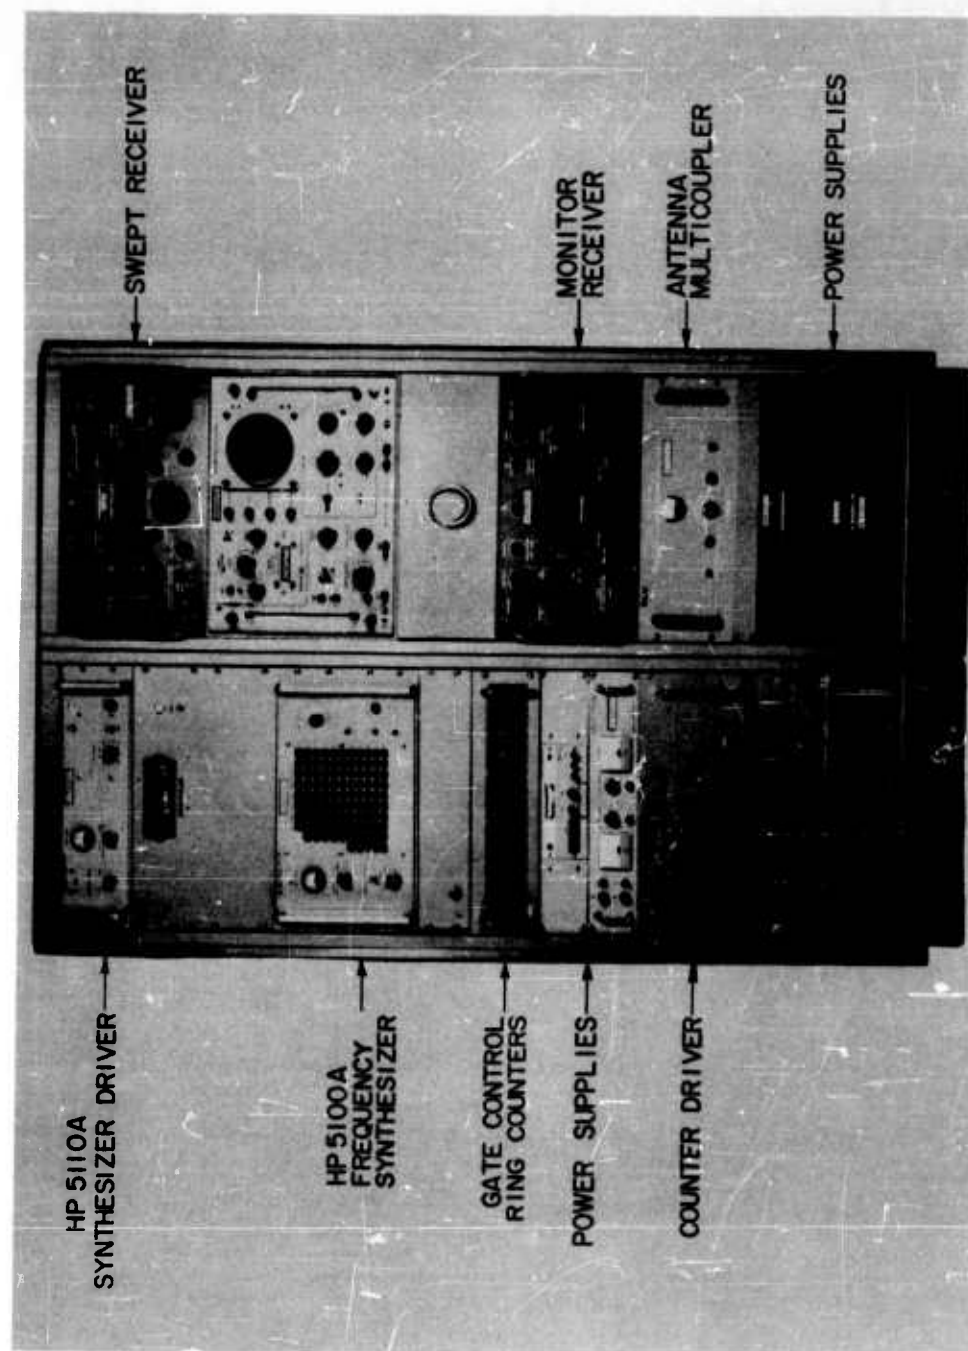
b. Receiving system

FIG. 8. FM RADAR TRANSMITTING AND RECEIVING SYSTEMS.

SEL-64-130
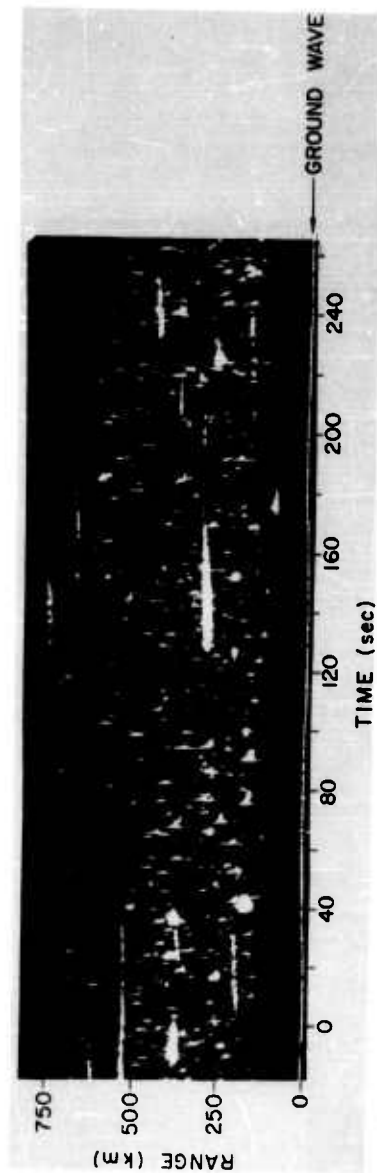
a. Meteor echoes
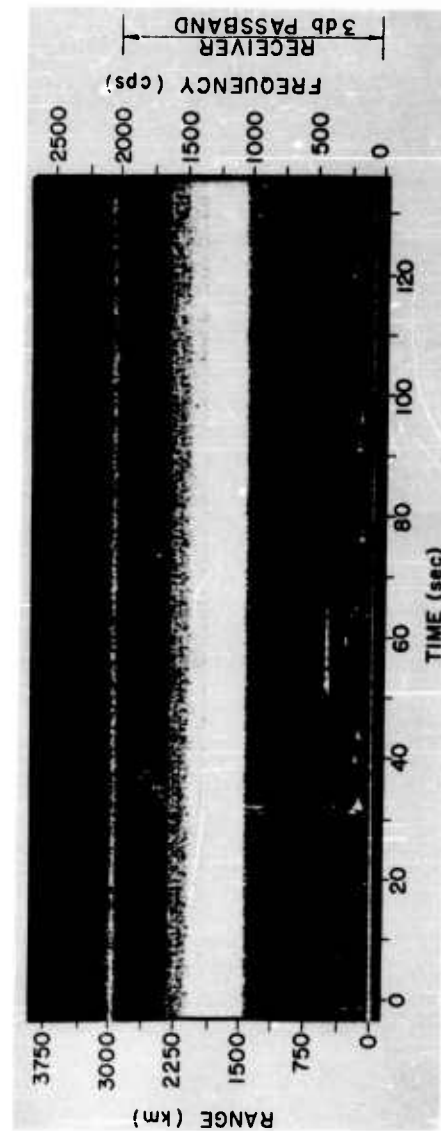
b. Backscatter

FIG. 9. RANGE-DOPPLER VS TIME RECORDS MADE WITH THE CW, FM RADAR SYSTEM. (Obtained at San Luis Obispo, Calif., November, 1964; 100-kc/sec sweep rate, 17-Mc frequency, 500-w transmitter, 270 deg azimuth.)

- 13 -

IV. CONCLUSIONS

The usefulness of commercially available, direct-frequency synthesizers may now be extended for applications other than the generation of constant- or stepped-frequency signals. Signals of continuously varying frequency may be approximated to considerable accuracy by rapidly programming such a synthesizer. It is expected that many applications will arise for signals of precisely time-varying frequency; the technique has already proved successful in generating linear frequency sweeps for use in FM radar.

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Stanford Electronics Laboratories Stanford University, Stanford, Calif.	UNCLASSIFIED
	2b. GROUP

3. REPORT TITLE

GENERATION OF ACCURATE FREQUENCY-SWEEP WAVEFORMS BY DIRECT SYNTHESIS

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

Technical Report

5. AUTHOR(S) (Last name, first name, initial)

R. B. Fenwick and G. H. Barry

6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
December 1964	14	none

8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)
ONR Contract Nonr-225(64) and b. PROJECT NO. ARPA Order 196-65	Technical Report No. 99 SU-SEL-64-130
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d.	

10. AVAILABILITY/LIMITATION NOTICES

Qualified requesters may obtain copies of this report from DDC. Foreign announcement and dissemination of this report by DDC is not authorized.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
	ONR

13. ABSTRACT

A signal whose frequency is a continuously varying function of time may be synthesized to any desired accuracy by digitally programming a "direct" frequency synthesizer. A synthesizer of this type (the Hewlett-Packard 5100A-5110A) can be modified to obtain phase-coherent frequency switching within a few hundred nanoseconds. The practicality of this mode of synthesizer operation has been demonstrated by the operation of a frequency-synthesized hf meteor radar. Two Hewlett-Packard synthesizers were modified and electronically programmed to generate 100-kc, 1-sec, linear frequency sweeps. The radar achieves close to the theoretically expected range and doppler resolutions of 1.5 km and 1 cps, respectively. It is expected that this extension of the use of frequency synthesizers for generating other than constant- or stepped-frequency signals will find many other applications where signals of precisely time-varying frequency are needed.

DD FORM 1 JAN 64 1473

ONR-ARPA UNCLASSIFIED DISTRIBUTION LIST

No. of Copies		No. of Copies	
	NAVY		**AIR FORCE**

NAVY

Chief of Naval Res.
Dept. of the Navy
Washington, D.C.
1   Attn: Code 402C
2   Attn: Code 418

Dir., Naval Res. Lab.
Washington 25, D.C.
1   Attn: Code 5320
           (Mr. J. M. Headrick)
1   Attn: Code 2027
1   Attn: Code 5320
           (Mr. E. Zettle)

Chief of Naval Operations
Dept. of the Navy
Washington 25, D.C.
1   Attn: OP-723E
1   Attn: OP-07TE

Dir., Special Projects Off.
Dept. of the Navy
Washington 25, D.C.
1   Attn: Code SP-204

Commander
Pacific Missile Range
Point Mugu, Calif.
1   Attn: Code 3215

Commander
Naval Missile Center
Point Mugu, Calif.
1   Attn: Code N03022

Commanding Officer and Dir.
U.S. Navy Elec. Lab.
San Diego, Calif.
1   Attn: Mr. H. J. Wirth
1   Attn: Library

Commanding Officer
U.S. Naval Ord. Lab.
Corona, Calif.
1   Attn: Mr. V.E. Hildebrand
           (Code 453)

AIR FORCE

Headquarters
Air Force Systems Command
Foreign Tech. Div.
Wright-Patterson AFB, Ohio
1   Attn: TDC (Mr. Zabatakas)
1   Attn: TDEED (Mr. W.L. Picklesimer)
1   Attn: TDATA (Mr. G.A. Long, Jr.)
1   Attn: TDCE (Mr. M.S.J. Graebner)

Headquarters, RTD
Bolling AFB
Washington, D.C.
1   Attn: RTHC (Col. Richard Cosel)

Rome Air Dev. Center
Res. and Tech. Div.
Griffiss AFB, New York
1   Attn: EMASR (Mr. V.J. Coyne)
1   Attn: RAVEL-3 (Mr. G.R. Weatherup)
1   Attn: RALCS (Mr. S. DiGennaro)

Commander
USAF Security Systems
San Antonio, Texas
1   Attn: ORL (Mr. W. L. Anderson)

Headquarters, USAF
Off. of Assistant Chief of
    Staff, Intelligence
Washington, D.C.
1   Attn: AFNICAA (Lt. Col. Long)
1   Attn: Policy & Prog. Gp., AFNINC
Hqs., N. Amer. Air Def. Command
Ent AFB
Colorado Springs 12, Colorado
1   Attn: NPSD-A (Col. M.R. Cripe)
1   Attn: NELC-AP

Hqs., AFCRL
L. G. Hanscom Field
Bedford, Mass.
1   Attn: CRUP (Dr. G.J. Gassman)
1   Attn: CRUI (Mr. W.F. Ring)

No. of
Copies

    HRB Singer, Inc.
    Science Park
    State College, Pa.
1   Attn: Library

    Institute for Def. Analyses
    400 Army-Navy Drive
    Arlington, Va
1   Attn: Dr. Paul von Handel

    Inst. of Science and Tech.
    The Univ. of Michigan
    P.O. Box 618
    Ann Arbor, Michigan
1   Attn: BAMIRAC Library

    Mass. Inst. of Tech.
    Center for Space Res.
    Bldg. 33-109
    Cambridge. Mass.
1   Attn: Dr. J. V. Harrington

    Mass. Inst. of Tech.
    Lincoln Lab.
    Lexington 73, Mass.
1   Attn: Dr. J. H. Chisholm

    MITRE Corp.-E Bldg.
    Rm. 353
    Bedford, Mass.
1   Attn: Mr. W. A. Whitcraft, Jr.

    National Bureau of Standards
    Boulder Labs.
    Boulder, Colorado
1   Attn: 85.20 (Mr. L.H. Tveten)

    Pickard and Burns, Inc.
    Res. Dept.
    103 Fourth Ave.
    Waltham 54, Mass.
1   Attn: Dr. John C. Williams

    Princeton Univ.
    James Forrestal Res. Center
    Sayre Hall
    Princeton, N. J.
1   Attn: Dr. Edward Frieman

No. of
Copies

    RAND Corp.
    1700 Main St.
    Santa Monica, Calif.
1   Attn: Dr. Ivan Selin
1   Attn: Dr. Cullen Crain
1   Attn: Library

    Raytheon Company
    Communication and Data
      Processing Operations
    1415 Boston-Providence Turnpike
    Norwood, Mass.
1   Attn: Mr. L. C. Edwards

    Stanford Res. Inst.
    Menlo Park, Calif.
1   Attn: Dr. David Johnson

    Mr. Thurston B. Scisson
    Box 8164 SW Station
1   Washington, D.C.

    Sylvania Elec. Systems
    Electronic Def. Labs.
    P.O. Box 205
    Mt. View, Calif.
1   Attn: Mr. John DonCarlos

    University of California
    Mathematics Dept.
    Berkeley 4, Calif.
1   Attn: Dr. Edmond J. Pinney

    Battelle-Defender
    Battelle Memorial Inst.
    505 King Ave.
    Columbus, Ohio
1   Attn: Doc. Center

    Dept of Elec. Eng.
    Radiolocation Res. Lab.
    University of Illinois
    Urbana, Illinois
1   Attn: 311 EERL (Mr. D.G. Detert)

    Bendix Corp.
    Bendix Radio Div.
    Baltimore 4, Md.
1   Attn: Mr. John Martin

UNCLASSIFIED